

★ Smart Booster

Controller with microprocessor for controlling up to 2 pump single or three-phase booster pumps. Booster controller allows you to manage your system, configure the parameters, logs events and messages with practically and multifunctional. (For pressurization in clean water applications)




- ◇ Smart Booster Panels are mounted in a specially designed IP 55 box that made of ABS material.
- ◇ Easy and quick set-up features with navigation buttons and readable LCD display
- ◇ Different types of connections to start and stop motor such as; pressure switches or pressure sensors


Technical Features

- Thermoplastic (ABS) / IP 55
- Power supply 1-50/60Hz 230V $\pm 15\%$
- Power supply 3-50/60Hz 400V $\pm 15\%$
- 128 x 64 LCD Graphical Display
- Green LED for Motor Running / Red LED for failures
- Input for start command (Pressure switch or sensors)
- Volt, Ampere, Alarms, Pressure, Events and Date & Time Screen on Home Page
- Displays Auto—Man Status
- Protections and Failures;
 - Motor Overcurrent / Low current (Adjustable)
 - Phase Loss and incorrect sequence
 - Min / Max Voltage (Adjustable)
 - Motor starting time
 - Dry running protection
- Main switch with locking mechanism
- Motor protection fuses
- Displays pump run time
- Display and adjust to Maintenance time
- Password protection for un-authorized people access.
- USB port for downloading failures, messages, events and alarms with date&time. (Last 500)
- MODBus Connection

Applications

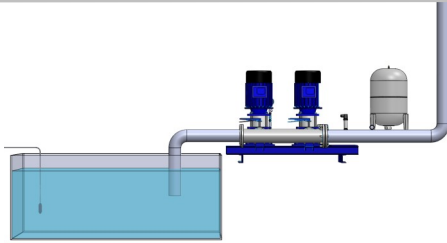

Pressure Transmitter

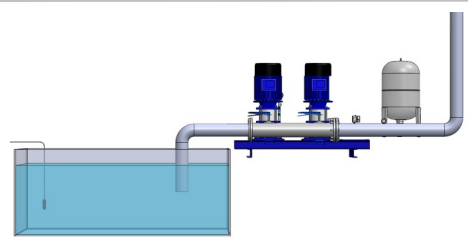

Pressure Switch

Technical Data

Smart Booster 1

Smart Booster 1		VOLTAGE	MAX		CURRENT		BOX DIMENSIONS				WEIGHT
	CODE	V-	kW	Hp	Range (A)	Max (A)	D	E	G	Material	KG
Smart Booster 1 / Mono	1001	1 - 230	2.2	3	0-18	18	310	250	130	ABS	
Smart Booster 1 - 4/ Tri	11001	3 - 400	4	5.5	0-8.6	8.6	310	250	130	ABS	
Smart Booster 1 - 5.5 / Tri	11002	3 - 400	5.5	7.5	0-11.6	11.6	310	250	130	ABS	
Smart Booster 1 - 7.5 / Tri	11003	3 - 400	7.5	10	0-15.8	15.8	310	250	130	ABS	
Smart Booster 1 - 11 / Tri	11004	3 - 400	11	15	0-25	25	310	250	130	ABS	
Smart Booster 1 - 15 / Tri	11005	3 - 400	15	20	0-32	32	310	250	130	ABS	

Smart Booster 2

Smart Booster 2		VOLTAGE	MAX POWER		CURRENT		BOX DIMENSIONS				WEIGHT
	CODE	V-	kW	Hp	Range	Max	D	E	G	Material	KG
Smart Booster 2 / Mono	1021	1 - 230	2.2	3	0-18	18	310	250	130	ABS	
Smart Booster 2 - 4/ Tri	11201	3 - 400	4	5.5	0-8.6	8.6	310	250	130	ABS	
Smart Booster 2 - 5.5 / Tri	11202	3 - 400	5.5	7.5	0-11.6	11.6	310	250	130	ABS	
Smart Booster 2 - 7.5 / Tri	11203	3 - 400	7.5	10	0-15.8	15.8	310	250	130	ABS	
Smart Booster 2 - 11 / Tri	11204	3 - 400	11	15	0-25	25	310	250	130	ABS	
Smart Booster 2 - 15 / Tri	11205	3 - 400	15	20	0-32	32	310	250	130	ABS	

*It is possible to realize the panel for 18.5 kW and largest capacity according to demand

**Please contact us for custom design production

Optional Accessories

Floater



Model	mt
F-S/5	5
P-T/10	10
P-T/15	15
P-T/20	20

Pressure Transmitter



Model	Voltage (V)	Range
P-T/10	12	10 Bar
P-T/16	12	16 Bar
P-T/25	12	25 Bar
P-T/40	12	40 Bar

Pressure Switch



Model	Range	Range Settings
P-S/10	1-5 Bar	10 Bar
P-S/16	3-12 Bar	16 Bar
P-S/25	2-14 Bar	25 Bar